



I:10

SYMMETRICAL TWO POST LIFT
10,000 lbs. Capacity



FEATURES:


- Symmetrical column design
- Spot-Rite™ 3-stage front arm design - spot vehicles asymmetrically or symmetrically
- Top mounted Direct-Pull lifting technology
- Cylinder rod concealed in carriage
- Adjustable width options
- Optional extended height kit adds 2'
- Single point lock release
- Powder coated finish
- Includes adapter storage bracket
- ALI Certified

INCLUDES LOW-PROFILE THREADED ADAPTERS AND (4 each) ADAPTER EXTENSIONS AT 3.5" and 5"



Spot-Rite™ 3-Stage Front Arm Design

Accommodates vehicle spotting both symmetrically and asymmetrically. Position the vehicle doors in front of or behind the lift columns to prevent door damage and allow easy technician access!

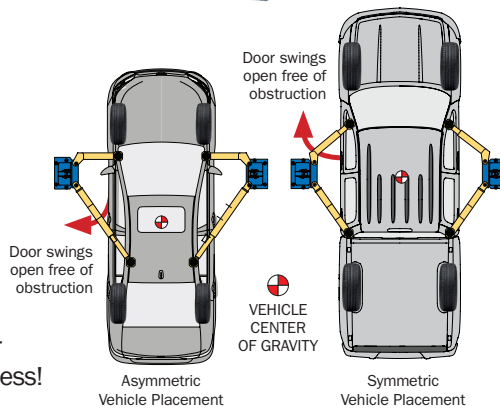

T100295 Extended Height Kit

The column extension kit is used to add an additional 2 feet (609.6 mm) to the top of the standard lift. This kit includes an extended length hose, return line, and cables to accommodate the extended height. Existing hardware included with the lift is used to attach the extensions.

This kit can be used on the current 500 series model i10 Forward Two Post Lifts.



SPECIFICATIONS I10N500MBL/RD*

SPECIFICATIONS	I10N500MBL/RD*
Capacity	10,000 lbs.
Maximum Rise with 5" Extension	76 1/4"
Overall Height	11' 9"
Optional Extended Height	13' 9" with T100295 kit
Overall Width	10' 9" or optional 11' 5"
Drive-Thru	99" or optional 105"
Overhead Switch Height	137 1/8"
Front Arm Reach (Min/Max)	23" / 44 3/8"
Rear Arm Reach (Min/Max)	36" / 58"
Minimum Adapter Height	3 3/4" without extension
Maximum Adapter Height	8 3/4" with 5" extension
Width Inside Columns	109" Standard 115" Optional
Ceiling Height Required	12'
Voltage/Amps	208-230V, 17 amps
Motor/Phase	1PH / 2HP / 60Hz



FWD I10N500MBL



ALI GOLD CERTIFIED

Forward Lift I10 meets the highest industry safety and performance standards. Your assurance of certification is the gold ALI/ETL certified label.



www.forwardlift.com



996 Industrial Drive
Madison, IN 47250

Phone: 800.423.1722
Fax: 812.273.7329

